


Blackhawk Environmental Company

Electric PM Anchor Pump® (Parallel Mounted Motor) Model 102E

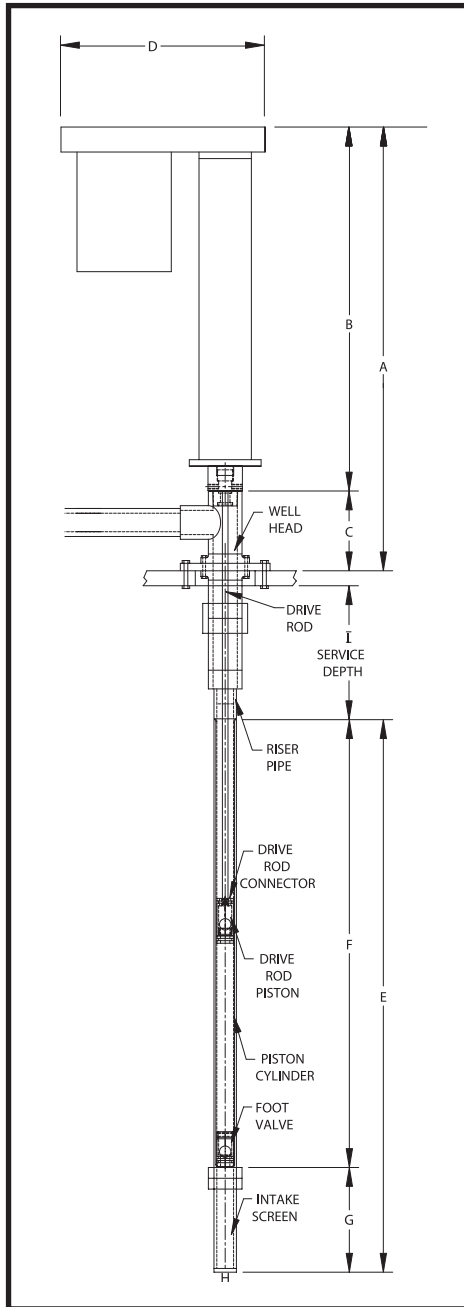

TECHNICAL DATA

STROKE LENGTH: 6"

FLOW RANGE: 0 to .7 US GPM

DISCHARGE PER STROKE: .06 US Gallons

MOTOR: 1/2 hp Standard
Variable Speed (Stroke) Control

POWER SUPPLY: 230 Volt Single Phase or
230/460 Volt Three Phase

DISCHARGE SIZE: 2" NPT

INSTALLATION: Unit can be installed
vertically or horizontally

DRIVER WEIGHT: 40 lbs.

DRIVE ROD WEIGHT: 8 lbs./100'

FOOT VALVE ASSEMBLY WEIGHT: 10 lbs.

RISER PIPE: 2"

MAXIMUM OPERATIONAL DEPTH: 120'
*with 1/2 hp motor

MINIMUM WELL CASING SIZE: 4"

DIMENSIONS (in inches)

Above Well Height	Driver Height	Discharge Tee Height	Top Plate Width	Foot Valve Assembly Length	Foot Valve Length	Intake Screen Length	Downhole Diameter
A	B	C	D	E	F	G	H
26.5"	21"	5.5"	13"	38"	30"	8"	2.9"

STANDARD MATERIALS OF CONSTRUCTION*



ABOVE GROUND

Description	Material
Drive Motor	Stainless Steel/Aluminum
Seal Plate	Viton
Seal Plate Seals	Delrin
Relief Valve	Stainless Steel
Relief Valve Tee	PVC
Well Head	Steel

DOWNHOLE


Description	Material
Drive Rod	Fiberglass
Drive Rod Connector	Stainless Steel
Drive Piston Seal	Viton
Drive Piston Check Ball	Delrin
Drive Piston	Delrin
Piston Cylinder	Stainless Steel/PVC
Foot Valve Check Ball	Delrin
Foot Valve	Delrin
Intake Screen	Stainless Steel/PVC

*Note: Specifications are subject to change without notice.
Materials of construction can be modified to meet application.

AVAILABLE OPTIONS

- Level Control Systems
- Hazardous Duty Components
- Metered Flow Control
- Flow Measurement
- Variable Frequency Drive
- SCADA Capability

**ELECTRIC PM ANCHOR PUMP® 102E
FLOW PERFORMANCE**

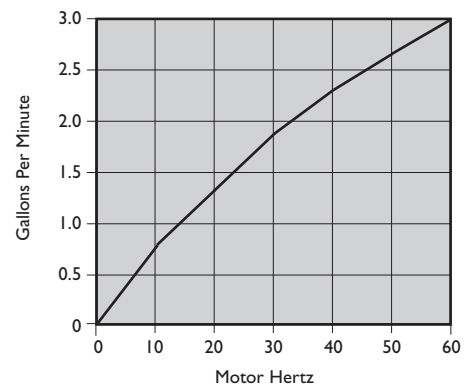

BLACKHAWK
ENVIRONMENTAL COMPANY

21W161 Hill Ave., Glen Ellyn, IL 60137
Phone: 630.469.4916 Fax: 630.469.4896
www.blackhawkco.com